
No image found

**LABORTECHNIK FRÃ¶BEL GMBH**
Bazienstr. 18f, D-88131 Lindau (0049)017676986491 | kontakt(at)labequip.de

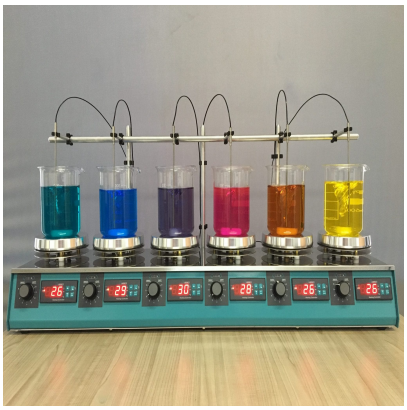

# LABINCO LD816 with probe

## Description

## Additional Information

| | |
|---|---|
| **Number of positions** | 4 or 6 Bench of Square models |
| **Max Quantity** | 4 or 6 x 5 ltr |
| **Motor Rating input(W)** | 4 or 6 x 35 W |
| **Motor Rating output(W)** | 4 or 6 x 15 W |
| **Speed display** | Analog |
| **Speed range(rpm)** | 50 - 1250 rpm |
| **Stirring bar length max(mm)** | 60mm |
| **Heat output** | 4 or 6 x 300 W |
| **Heating rate** | 7 K/min |
| **Heating temperature range** | Room temp up to 350 C |
| **Heat control** | Digital |
| **Heat control accuracy** | 1 K |
| **Speed control** | Stepless |
| **Adjustable safety circuit min** | 0 C |
| **Adjustable safety circuit max** | 350 C |
| **Connection for ext. temperature sensor** | On request |
| **Control accuracy with sensor** | 1 K |
| **Temperatureconstancyinmedium** | 1 K |
| **Dimensions (W x D x H)** | 835 x 245 140 mm (6 pos.) |

**LABORTECHNIK FRÃ¶BEL GMBH**
Bazienstr. 18f, D-88131 Lindau (0049)017676986491 | kontakt(at)labequip.de

| | |
|---|---|
| **Weight(kg)** | 14 kg |
| **Permissible ambient temperature** | 4 -50 C |
| **Permissible relative humidity** | 80% |
| **Protection class according to DIN EN 60529** | IP42 |
| **Voltage** | 220 - 230 V |
| **Frequency** | 50/60 Hz |
| **Power input** | 6 pox. 2050 W (4 pos. 1350 W) |